





Anti-Extrusion Backup Rings


FLAT BACKUP RINGS

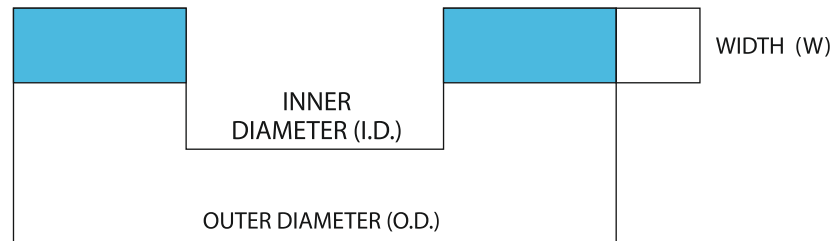

CONTOUR DESIGN BACKUP RING

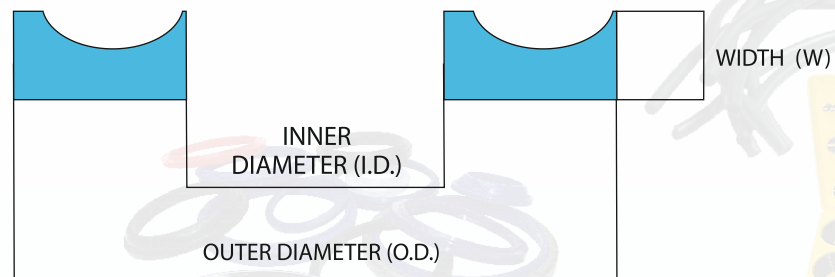

BACKUP RINGS PREVENT EXTRUSIONS OF O-RINGS IN HIGH PRESSURES, USUALLY ABOVE 1500 PSI & COMPENSATE FOR LOOSE FITTING COMPONENTS.

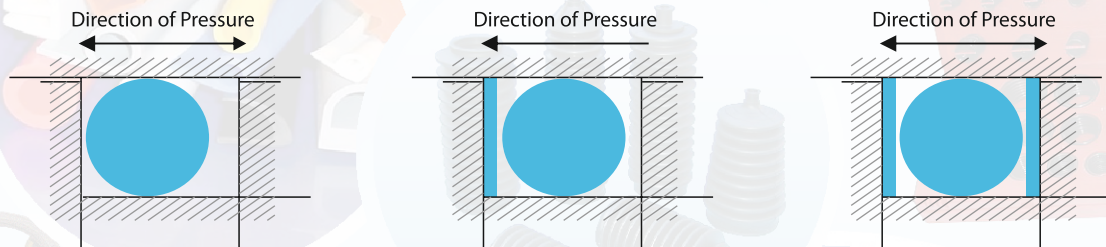

ONE BACKUP RING SHOULD BE USED ON EACH SIDE OF THE ORING IN DOUBLE ACTING ASSEMBLIES.

IF POSSIBLE, TWO BACKUPS SHOULD BE USED EVEN IN SINGLE ACTING ASSEMBLIES.

IF ONLY ONE BACKUP RING IS USED, THE ORING SHOULD BE PLACED BETWEEN THE PRESSURE SOURCE AND THE BACKUP RING

SPECIALIZED IN VITON® ELASTOMERS

- WE ALSO MANUFACTURE CUSTOM DESIGNS AS PER CUSTOMER SPECIFICATIONS.
- FOR MORE DETAILS ON SIZES AND DESIGN TYPE, KINDLY CONTACT US
- VITON® IS A REGISTERED TRADEMARK OF DUPONT